

## PATENT

In re Application of

U.S. Patent Application No.

**Group Art Unit:**

Filed: October 31, 2003

**Examiner:**

**CLAIM OF PRIORITY AND**  
**TRANSMITTAL OF CERTIFIED PRIORITY DOCUMENT**

Dear Sir:

Respectfully submitted,

**LOWE HAUPTMAN GILMAN & BERNER, LLP**

Alan M. Lane

Allan M. Lowe  
Registration No. 19,641

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111 AML/pjc  
Facsimile: (703) 518-5499  
October 31, 2003





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

Dated

*P. McHorney*  
7 October 2003

10


11



144PR03-E799853-1-001463  
P01/7700/0.00-0308471.2

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

300110632-1 GB

2. Patent application number

(The Patent Office will fill in this part)

0308471.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Hewlett-Packard Development Company, L.P.  
20555 S.H. 249  
Houston, TX 77070  
USA

Patents ADP number (if you know it)

8557886001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Method and Associated Apparatus for  
Creating a Network Connection to a Network

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

Richard A. Lawrence  
Hewlett-Packard Ltd, IP Section  
Filton Road, Stoke Gifford  
Bristol BS34 8QZ

Patents ADP number (if you know it)

7563083001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:


- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Yes




# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

## Continuation sheets of this form

Description	21
Claim(s)	4
Abstract	1
Drawing(s)	5 TS 

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	1 
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	Fee Sheet  

11.

I/We request the grant of a patent on the basis of this application.

Signature 

Date

Richard A. Lawrence

10/4/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Meg Joyce Tel: 0117-312-9068

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

# METHOD AND ASSOCIATED APPARATUS FOR CREATING A NETWORK CONNECTION TO A NETWORK

5 This invention relates to a system and related apparatus and methods for effecting at least one network connection.

MobileIP is a proposal that allows a mobile computing device to move between different wireless networks by creating network connections to a  
10 network to which the computing device wishes to enter. Although well known, it has yet to find wide applicability using the current Internet Protocol version 4. It will be appreciated that different formats of wireless network exist. For example, and naming only some of the protocols available, there are mobile telephone networks (GPRS and the  
15 proposed UMTS network), Wireless Local Area Networks (for example Bluetooth and WIFI (IEEE 802.11)).

A wireless network has a finite bandwidth for connections that can be made thereto. If this bandwidth is exceeded performance may drop off  
20 for devices that are connected to the network, network connections may be lost; in general network performance may be downgraded. In general therefore, it has been a problem with prior proposals that should too many connections be made, or attempted, then it is possible for the performance of the network to be adversely affected.

25

According to a first aspect of the invention there is provided a method of attempting the creation of a network connection from a computing device to a network wherein the method comprises causing a processing circuitry to determine the bandwidth associated with at least a portion of  
30 the network connection that it is desired to make to the computing device from the network and further causing the processing circuitry to assess

whether this bandwidth is available from the network before commencing creating the connection.

5 An advantage of such an arrangement is that it may help to reduce failed connections between the computing device and the network.

10 Preferably, the method is used to hand-over a network connection from an existing network to the network and as such is advantageous because it may help to reduce the number of network connections that are lost. Previously, it has simply been attempted to hand-over the network connection from the existing network to the network and if this hand-over failed, the network connection to the computing device would be lost. Although primarily aimed at wireless networks, this invention may find wider applicability.

15 Alternatively, or additionally, the method may be applied to further network connections to a network from a computing device that already has connections to the network. These further network connections may comprise one or more channels as discussed hereinafter.

20 Said network connection between the computing device and the existing and/or the network may comprise one or more channels. Generally, each channel will be assigned to a specified IP port of the computing device. Generally, any one piece of application software running on the computing device may be assigned a channel of the network connection. 25 Some software applications may be assigned a plurality of channels. Of course, it will be appreciated that increasing the number of channels available for software can be used as a mechanism to increase the bandwidth for that software.

30



The method may comprise causing the processing circuitry to determine the bandwidth required by each of the channels within the network connection. Such a method is advantageous because it may allow a network hand-over to be completed for some, but not all of the channels.

- 5 Indeed, the method may allow some channels to be maintained with the existing network, whilst other channels are handed over to the network, or channels may be dropped if they are not handed over to the network.

Alternatively, or additionally, the method may comprise determining the  
10 total bandwidth of the network connection and the network.

The method may be arranged to hand-over a connection from an existing network to a network running the same, or substantially the same, protocol. Such a method is applicable for networks that comprise a  
15 plurality of cells (as well as networks that do not), and the method may manage the hand-over of a connection between a first cell and a second cell (i.e. the first cell may comprise the existing network and the second cell may comprise the network). The method may, for example, be arranged to hand-over a connection between a first cell of a WIFI  
20 network, to a neighbouring, second, cell of the WIFI network. The second cell would generally operate on a different channel of the available WIFI frequency bands to the first cell to avoid interference.

Alternatively, the method may be arranged to hand-over a connection  
25 from an existing network to a network operating on a different protocol. For example, the method may be arranged to hand-over an existing connection from a cellular telephone network (for example GPRS, UMTS, or the like) to a connection to a wireless LAN (for example IEEE 802.11, Bluetooth, or the like). Such an arrangement is convenient  
30 because, as the skilled person will appreciate, different network protocols have different advantages. Cellular phone networks have a wide

coverage, but are expensive and offer lower bandwidth when compared to wireless LAN's. Wireless LAN's may be looked on as having a higher bandwidth than other protocols, but generally have a lower coverage.

- 5 The processing means used to determine the bandwidth of at least a portion of the network connection and/or to assess whether this bandwidth is available from the network may be provided by the computing device or the network.
- 10 According to a second aspect of the invention there is provided a processing unit arranged to provide a wireless network capable of making one or more data connections to at least one computing device, said processing unit comprising a receiving means, arranged to receive data specifying the bandwidth requirements for a network connection between
- 15 the network and a computing device that wishes to join the network, a processing means, arranged to process data received from said receiving means and if bandwidth is available to cause an allocation means to allocate a bandwidth to at least one of the connections.
- 20 Such a processing unit is advantageous because it can help to reduce lost connections as computing devices join the network in that the computing device may be assigned the bandwidth it requires before the data connection is created between the network and the computing device.
- 25 The receiving means may be a port/interface of the processing unit that connects to the wireless network, and as such, data may be received from the wireless network.

Generally, the processing unit is a server arranged to provide the wireless

30 network.

According to a third aspect of the invention there is provided a computing device capable of connecting to at least one wireless network, said computing device comprising a detection means arranged to detect the existence of wireless networks to which it is capable of connecting, a  
5 bandwidth measuring means, arranged to determine the bandwidth of one or more connections that it is desired to make with a network, and transmission means arranged to transmit the bandwidth determined by the bandwidth measuring means to a network detected by the network  
10 detection means to which it is possible to make a connection said computing device further comprising a transceiver arranged to establish a connection with said network should sufficient bandwidth be available.

The computing device may be a PC (particularly those referred to as notebooks), an iBook, PDA, telephone, or any other, generally portable,  
15 computing device. The computing device may be arranged to make a connection to a wireless network only after it has negotiated with the network the bandwidth that it requires.

According to a fourth aspect of the invention there is provided a computer  
20 network comprising a processing unit providing a wireless network comprising at least one data connection to a computing device, said processing unit comprising a receiving means, arranged to receive data from said computing device, said network further comprising a bandwidth  
25 assessing means arranged to determine the bandwidth requirements for further network connections that it is desired to make to the network from one of said computing device and another computing device wishing to join the network, the processing means further comprising a processing  
means arranged to process data received from said receiving means and cause an allocation means to allocate a bandwidth to at least one of the  
30 connections.

The bandwidth assessing means may be provided on the processing unit of the network. However, the bandwidth assessing means is likely to be placed on the computing device since it is unlikely that the processing unit will be able to determine the bandwidth until a network connection has been established.

According to a fifth aspect of the invention there is provided a data carrying medium containing instructions, which when loaded on to a computer system, cause that computer system to perform a method according to the first aspect of the invention.

According to a sixth aspect of the invention there is provided a data carrying medium containing instructions, which when loaded on to server, cause that server to perform as a server according to the second aspect of the invention.

According to a seventh aspect of the invention there is provided a data carrying medium containing instructions, which when loaded on to a computing device, cause that computing device to perform according to the computing device according to the third aspect of the invention.

According to a eighth aspect of the invention there is provided a data carrying medium containing instructions, which when loaded on to a network, cause that network to perform according as the network according to the fourth aspect of the invention.

It will be appreciated that the computer readable medium of any of the fifth, sixth, seventh and eighth aspects of the invention may comprise any of the following: a floppy disk, a CDROM, a DVD ROM/RAM (including +RW, -RW), any form of magneto optical storage, a hard drive, a

transmitted signal (including an Internet download, file transfer, or the like), a wire, or any other vehicle for conveying computer data.

Embodiments of the present invention are now described by way of example only and with reference to the accompanying drawings, of which:

**Figure 1** shows an example of a wireless network;

**Figure 2** shows a schematic representation of a wireless network comprising a 'hotspot';

**Figure 3** shows a schematic representation of a server that may be utilised to provide the present invention;

**Figure 4** shows a schematic representation of a computing device;

**Figure 5** shows a flowchart outlining the processes of the first embodiment of the present invention;

**Figure 6** shows schematic representation of two cells of a wireless network;

**Figure 7** shows a flowchart outlining the processes of the second embodiment of the present invention; and

**Figure 8** shows the seven-layer OSI model.

Computing devices such as PC's (especially those referred to as laptops), iBooks, mobile phones and Personal Digital Assistants (PDA's) which access wireless networks are increasingly common. The present invention

is described in relation to two common 'hand-over' procedures that a connection between a mobile device and a network may undergo. A successful hand-over may be thought of as one that does not affect the on-going use of data transfer to and from the device.

5

An example of a wireless network 2 is shown in Figure 1 and comprises a server 4 which has a network address 8 and comprises a WIFI hub 7 to generate the network 2. In this example the network generated by the server 4 is a WIFI network and may provide a cell operating on one of the three available WIFI channels, but of course any other suitable wireless protocol may be used. The server 4 has a network address 8, which in this example is 129.121.13.5 which follows the well known TCP/IP protocol as will be well understood by the skilled person. In communication with the server 4, via the wireless network 2, is a mobile computing device 10, which in this case is a laptop PC. The computing device also has a network address 12, again following the well-known TCP/IP format. Again, it will be appreciated by the skilled person that other network addresses formats may be possible and that the TCP/IP format is provided merely by way of example. Data packets 14 sent from the computing device to the server 4 contain the network address 8 of the server, and likewise data packets 16 for the computing device 10 contain the network address 12 of the computing device 10.

It is of course possible for an area to be covered by two or more wireless networks. For example, a building may be provided with a WIFI network, but within the building there may exist short range BLUETOOTH connections, and the building and its surrounding area may be covered by a mobile telephone network (for example a GPRS, or UMTS network). Other scenarios are equally possible. An example of such an arrangement is shown in Figure 2, which comprises a GPRS

30

(general packet radio service) wireless cellular network N and an IEEE 802.11 network H.

If an area is covered by two networks, each of which is operating the same protocol (i.e. technology), a so-called horizontal hand-over occurs when a network connection is moved between the two networks. An example of such a hand-over would be moving between cells in a cellular network. A horizontal hand-over occurs at the datalink layer of the Open Systems Interconnect (OSI) reference model, which provides an interface with the network adapter and maintains logical links for the subnet. More specifically, the hand-over occurs at the medium access control sub layer. For ease of reference, the OSI reference model is shown in Figure 7. In such a horizontal hand-over, a computing device 10 maintains its own IP address 12.

15

If the networks utilise differing protocols (i.e. technologies), a so-called 'intertech example of macromobility', a vertical hand-over occurs. In this case, the hand-over occurs at the network layer of the OSI reference model (which handles the logical addressing and routing of data from a computing device), typically via the Internet protocol. The computing device 10 is given a new IP address 12.

As discussed above a first embodiment of the present invention relates to a 'hotspot' provided by an IEEE 802.11 network h within a wireless GPRS network N. The user of a mobile communication device such as a laptop computer or a WAP (Wireless Application Protocol) telephone may generally connect to the cellular network N. It will be appreciated that the demand for network connections within an office building will usually be more concentrated than outside and that the bandwidth requirement from any data connection to the network may well be higher. Therefore, when inside an office building, it is preferable to provide an alternative

wireless network, for example W-LAN (IEEE 802.11) network, a Bluetooth network, etc. that may be geographically more limited than the GPRS network N, but cheaper and faster and capable of accepting a greater load than a cellular network

5

It will be appreciated that any one computing device may have a plurality of software applications running thereon. For example, an Internet browser may be open, an email program may be sending/receiving emails from a mail server, it is conceivable that video, or audio, may be being  
10 streamed. These as well as other applications may all be running concurrently. It will therefore be appreciated that any one network connection between a computing device and the wireless network may in fact comprise a number of channels. Each application communicating across the wireless network uses at least one channel, and some  
15 applications (generally those with a higher bandwidth requirement such as video streaming) may use a plurality of channels within the network. Each channel within the network connection is generally assigned a port of the IP address 12.

20 When moving into the area covered by the hotspot network H, ideally the data connection and all of its channels should be transferred onto the hotspot network H from the GPRS network N. As described below, this may not always be possible since the hotspot network H may not have the available bandwidth to achieve this.

25

It may be possible to prioritise various channels within any one network connection. Such prioritisation may occur either by user input on their own computing device or according to predetermined rules set by the system/computing device. Some applications may be considered essential  
30 (i.e. without these particular applications, the network connection may as well be terminated). The remaining applications may be ranked according



to their usefulness. As an example, it is likely that a channel assigned to a video connection will be given a high priority due to its real time nature: if packets are dropped, or interfered with, the quality of the video will be affected. Further, it is likely that a channel assigned to an email  
5 program will be assigned a low priority: it does not generally matter if the exchange of emails is interrupted since this may be resumed at a later time.

As can be seen in Figure 2 the IEEE802.11 hotspot network H comprises  
10 a server 100H and the GPRS network comprises a server 100N. These servers 100H,N and that shown in Figure 1 may have the construction shown schematically in Figure 3 and described below although others are equally possible. Also shown in Figure 2 are a first 102a, a second 102b and a third 102c computing device. These generally share the  
15 construction of computing device 102 shown schematically in Figure 4 and described below.

The servers 100H,N and 4 may comprises a processing means 201 (which will generally be 2 of 4 processors such as the Intel Pentium 4 processor  
20 running at 2GHz or more) connected via a bus 202, to a memory 204 and a hard drive array 206. The hard drive array 206 will generally comprise a RAID (Redundant Array of Inexpensive Disks) in order to increase data security. The bus 202 also connects the processor to a display driver 208, which can drive a monitor connected to an output  
25 interface 210. An input/output controller 212 also connects to the bus 202 and allows a keyboard, mouse, etc. to be connected to the processor 201 via ports 214 which would typically be Universal Serial Bus (USB) ports. A network controller 216 is provided to connect the processing means 201 to a network via an output port 218. The  
30 processor 201 is further connected to an IP port 220, which provides access to the Internet. The server 100, together with network adapters,

provides the necessary processing circuitry to operate a network. Of course, although example hardware has been described for the architecture of the server 4,100 it will be readily appreciated that other hardware / architectures will be equally possible. Generally, the server  
5 will run an operating system such as Windows NT provided by the Microsoft Corporation, LINUX, HP UNIX, or the like.

The processing means of the server may provide the bandwidth assessing means, and bandwidth assessing means of a network arranged to assess  
10 the bandwidth of a new or existing connection or channel and allocate sufficient bandwidth for a new connection or channel respectively.

Figure 4 shows an example of the architecture of a computing device 102 that could be connected to a network. In the example shown, the  
15 computing device 102 is a portable PC running the LINUX operating system. However, in other embodiments the computing device 102 may be any other form of computing device, and may be a portable PC running Microsoft™ Windows™ 2000, Windows XP™, Apple™ iBooks™, PDA's, telephones, or any other form of computing device.

20 The structure of the computing device 102 is similar to that of the server. A processing means 301 (in this case generally a single processor such as an mobile Intel Pentium 4 running at 2GHz or above) is connected, via a bus 302, to a memory 304, and a hard drive 306. The bus 302 also  
25 connects the processor to a display driver 308, which can drive an LCD display driven by an output interface 310. An input/output controller 312, is also connected to the bus 302 and drives a keyboard 320 and a trackpad 322 via a connection 314 and allow a user to make inputs thereto. A network card, in this case wireless network  
30 PCMCIA card 316, is provided to allow the processor 301 to make a connection to a network via an aerial 318 which in this case is external to

the computing device 102 but would generally be included within the casing thereof. The network card provides a transceiver that allows the computing device 102 to communicate with a network. It will be appreciated that a network card is provided for each different technology  
5 network, network protocol, to which it is desired to connect. For example, if the computing device is to connect to a WIFI or IEEE 802.11 network then it must have a network card capable of communicating with this technology. Similarly, for the computing device to connect to a cellular, or GPRS network, then it must have a network card capable of  
10 such communication.

In the example of Figure 2, the first computing device 102a is inside the cellular network N but outside the hotspot network H (the hotspot network providing a network). It is therefore connected to the cellular  
15 network N (the cellular network providing an existing network). The second computing device 102b is also within the cellular network N but outside the hotspot network H, although it is close to the boundary of the hotspot network H. It is connected to the cellular network N but, as discussed below, is engaged in negotiations with the server 100 inside the  
20 hotspot network H. The third computing device 102c is within the hotspot network H and the cellular network N. It may be connected to the hotspot network H, the cellular network N or may have applications running on both networks. It will be appreciated that the computing device 102c can communicate with both the cellular network N and the  
25 hotspot network H since the areas covered by the networks overlap.

The first embodiment of the present invention is described in relation to a transfer between networks when a single computing device 102 is moved from the position occupied by the first computing device 102a (i.e.  
30 remote from the hotspot network H), through the position occupied by the second computing device 102b (i.e. at the boundary of the hotspot

network H), to the position of the third computing device 102c (i.e. within the hotspot network H)

Both the computing device 102 and the server 100 inside the hotspot  
5 network H run a SIP (Session Initiation Protocol) application. Under  
SIP, and according to prior art practices, a mobile computing device is  
assigned an address, known as a SIP address, when it connects to a SIP  
server as part of the hand-over procedure. This enables the computing  
device 102 to be identified within the network. The SIP address is  
10 assigned at the application layer, the highest layer of the OSI model (the  
skilled person will be familiar with the OSI model). SIP is provided to  
facilitate MobileIP, i.e. dropping and initiating connections when moving  
between networks without terminating applications. It has long been a  
limitation of MobileIP that if a computing device 102 moves into an area  
15 covered by a network that can not, for some reason (such as limited  
bandwidth) provide sufficient bandwidth for a connection to the  
computing device then a network connection between the computing  
device and the network to which it is moving cannot be established.  
Therefore, any channels of a network connection that exist between the  
20 computing device and another network cannot be transferred to the  
network and if a transfer is attempted it is likely that one or more  
channels may be lost.

The server 100 periodically transmits a SIP signal to advertise its  
25 presence. The SIP application running on the processor 301 of the  
computing device 102 is arranged to acknowledge these signals if the  
computing device 102 proposes to connect to the hotspot network. In the  
present embodiment, this acknowledgement is enhanced which may  
provide for a more frequently successful transfer process.

The computing device 102 will perform the following processes depending on its location. The processes are summarised in the flowchart of Figure 5.

- 5 The computing device 102 approaches the vicinity of the hotspot network H whilst possibly connected to the cellular network N (step 400). It will be appreciated that the computing device may not have any network connections that exist. The server 100 periodically emits a SIP signal, which may be thought of as an invitation to close-by computing  
10 devices to connect to the network it advertises. When the computing device 102 is in the position of computing device 102a, it does not receive the invitation, or does not receive the invitation with sufficient strength to warrant acknowledgement, as it is too distant from the server 100. The computing device 102 therefore maintains any existing  
15 network connection to the cellular network N (step 402). However, when the computing device 102 is in the position of computing device 102b, it does receive the invitation and enters into a 'handshake' process (step 404) which occurs using the appropriate network card of the computing device. For example if the hotspot network H is an  
20 IEEE 802.11 network then the handshake occurs using IEEE 802.11.

In other embodiments, it would of course be possible to perform the handshake with a network protocol other than that of the network to which it is desired to connect. For example, the handshake may be  
25 performed by communicating with the server 100 via the cellular network N to negotiate connection to the hotspot network H.

This handshake process comprises the SIP application running on the processor 301 of the computing device 102 sending a signal comprising  
30 acknowledgement of the invitation and details of the applications it is running over the cellular network. These details may include any of the

following: the bandwidth required to provide one or more channels associated with each application, the port number of the application and the priority level of the application (i.e. how important it is that the application should not be terminated). In this embodiment, all of this  
5 information is transmitted to the server 100. The signal is a request for bandwidth, which, if available could be pre-allocated to the computing device 102 before it attempts to commence a hand-over, or connection to the hotspot network H. The server 100 of the hotspot network H receives this signal and compares the bandwidth requirements of each application  
10 with the bandwidth available (step 406).

It may be that the hotspot network H can well provide a network connection for the computing device 102, in which case the bandwidth required is pre-allocated (step 408). The server 100 then sends a message  
15 to the effect that, if the computing device 102 was to enter the hotspot network H, then the application hand-over to the hotspot network H should be successful (step 410). If the computing device 102 then enters the hotspot network H (step 412), the network connection (including any channels therein) is transferred to the hotspot network H (step 414).  
20 Otherwise, if the computing device 102 does not enter the hotspot network H, the computing device 102 remains connected to the cellular network N (step 416).

Such transfer is intended to include the use of a 'care of address' as  
25 utilised in MobileIP, or the assignment of an address within the network. It will be appreciated that even if a care of address is used the network will still have to have sufficient bandwidth to support the new network connection to the computing device 102.

30 It may be that the hotspot network H can only accommodate some of the channels associated with applications running on the computing

device 102 in which case the bandwidth required for each channel is considered (step 417). It is determined which of the channels (generally starting with the highest priority channel) can be accommodated on the hotspot network H. The bandwidth for these channels is preallocated by the server 100. The server 100 then sends a message to the effect that, if the computing device 102 was to enter the hotspot network H, then the network connection hand-over to the hotspot network H would be partially successful (step 420). If the computing device 102 then enters the hotspot network 102 (step 422), the channels within the network connection, identified by (in this embodiment) their port numbers, can be transferred to the hotspot network H in order of priority (step 424). The remaining, low priority, applications can either be terminated (step 426) or remain connected to the cellular network N (step 428). Otherwise, if the computing device 102 does not enter the hotspot network H, the computing device 102 remains connected to the cellular network N (step 416).

If the hotspot network H can accommodate none of the network applications running on the computing device 102, or can not accommodate all the essential applications, the server 100 sends a message to the effect that, if the computing device 102 was to enter the hotspot network H, then the application hand-over to the hotspot network H would be unsuccessful (step 430). The computing device 102 then remains connected to the cellular network N (step 416), even if the computing device 102 is physically within the area covered by the hotspot network H.

As an additional step, connection to the hotspot network H may only proceed if the user of the computing device 102 indicated in response to the message from the server 100 that the available resources are sufficient to initiate a complete or partial hand-over. Alternatively, the resources

may have to meet predetermined system standards before a hand-over, or partial hand-over, is initiated.

5 As a second embodiment of the present invention, consider a cellular network as shown schematically in Figure 6 comprising a first C1, and a second C2 cell, the first cell C1 containing a first server 100C1, and the second cell containing a second server 100C2. Also shown are a first 102d, a second 102e and a third 102f computing device.

10 The first computing device 102d is inside the first cell C1 and is connected to the first server 100C1. The second computing device 102e is within the overlap between the first cell C1 and the second cell C2. Generally, the first and second cells operate on a different frequency band if they are using the same network protocol so that interference does not  
15 occur between the cells. IEEE 802.11 generally has three channels for such purposes. The second computing device 102e is connected to the first server 100C1 but, as discussed below, is engaged in negotiations with the second server 100C2. The third computing device 102f is within the second cell C2. It is connected to the second server 100C2. The  
20 computing devices 102d, 102e, 102f share the construction of the computing device 102 shown in Figure 4. Both the first server 100C1 and the second server 100C2 run a SIP (Session Initiation Protocol) application. The servers 100C1, 100C2 share the construction of the server 100 shown in Figure 3.

25

The second embodiment of the present invention is described in relation to a move between the cells C1, C2 of a cellular network. The computing device 102, for the purpose of this example, travels from the position occupied by the first computing device 102d (i.e. within the first cell C1)  
30 through the position occupied by the second computing device 102e (i.e. within the overlap between the first cell C1 and the second cell C2) then



to the position occupied by the third computing device 102f (i.e. within the second cell C2).

5 The computing device 102 will perform the following processes depending on its location. The processes are summarised in the flowchart of Figure 7.

10 The servers 100C1, 100C2 periodically emit a SIP signal, which may be thought of as an invitation to close-by computing devices to connect to the network cell it advertises.

15 The computing device connects to the server 100C1 of the first cell C1 (step 600) when the computing device 102 is in the position of the first computing device 102d. It is in communication with the server 100C1 and does not receive the invitation from the server 100C2, or does not receive the invitation with sufficient strength to warrant acknowledgement, as it is too distant from the server 100C2. It therefore maintains its connection to the first server 100C1 (step 602). However, when the computing device 102 is in the position of the second computing device 102e, it does receive the invitation from the server 100C2 and enters into a 'handshake' process. This handshake process (step 604) comprises the SIP application running on the processor 301 of the computing device 102 sending a signal comprising acknowledgement of the invitation from the second server 100C2 and details of the network applications that it is running. These details include at least some of the following, but in this embodiment includes all of the following: the bandwidth required to accommodate each channel of the network connection, the port number assigned to the channel and the priority level of the channel (i.e. how important it is that that channel should not be terminated). The signal may be construed as a request for bandwidth, which, if available could be pre-allocated to the computing device 102.

20

25

30

The server 100C2 of the second cell C2 receives this signal and compares the requirements of each application with the bandwidth available (step 606).

- 5 It is conceivable that the first and second servers 100C1,C2 would communicate, may be after being alerted as to the desire to transfer by the hand-shake process initiated by the computing device 102. However, it is perhaps convenient for the hand-shake, or related communication, to include information relating to the bandwidth, port numbers, or the like,  
10 so that applications that are started when as the computing device 102 is in the process of transferring to the second server 100c2 are effectively communicated to the second server 100C2.

- It may be that the second cell C2 can well accommodate the computing  
15 device 102, in which case bandwidth required is pre-allocated (step 608). The second server 100C2 then sends a message to the computing device 102, indicating that, should the computing device 102 enter the area of the second cell C2, a hand-over would be successful (step 610). If the computing device 102 then enters the second cell (step 612), the  
20 channels constituting the network connection are transferred to the second cell C2 (step 614). Otherwise, if the computing device 102 does not enter the second cell C2, then computing device 102 remains connected to the first cell C1 (step 616).

- 25 It may be that the second cell C2 can only accommodate some of the channels of the network connection, in which case the bandwidth required for each application is considered (step 617). This consideration step starts with those channels deemed to have the highest priority. The second server 100C2 then sends a message to the computing device 102,  
30 indicating that, should the computing device 102 enter the area of the second cell C2, a hand-over would be partially successful (step 618). The

bandwidth required for each channel is pre-allocated (step 620). If the computing device 102 then enters the second cell C2 (step 622), these channels, identified by their associated port numbers, can be transferred to the second cell C2 (step 624). The remaining, low priority, applications are then terminated (step 626). Otherwise, if the computing device 102 does not enter the second cell C2, then the computing device 102 remains connected to the first cell C1 (step 416)

If the second cell C2 can accommodate none of the network application running on the computing device 102, or can not accommodate all the essential applications, the second server 100C2 then sends a message to the computing device 102, indicating that, should the computing device 102 enter the area of the second cell C2, a hand-over would be unsuccessful (step 628). If the computing device 102 enters the second cell C2 (step 630), the connection with the cellular network would be terminated (step 632). Otherwise, if the computing device 102 does not enter the second cell C2, then the computing device remains connected to the first cell C1.

Although in the above embodiments the channels which should be transferred to the network are automatically detected based upon a priority assigned to that channel, if they cannot all be transferred, other mechanisms could be employed. For example a best fit of channels to the available bandwidth from the network could be performed. Or in yet another alternative embodiment a user of the system could be provided with a list of channels (and/or applications associated with those channels) and asked to elect which channels they wish to keep open. Other mechanisms may be possible.

**CLAIMS**

1. A method of attempting the creation of a network connection from  
5 a computing device to a network wherein the method comprises causing a  
processing means to determine the bandwidth associated with at least a  
portion of the network connection that it is desired to make to the  
computing device from the network and further causing the processing  
means to assess whether this bandwidth is available from the network  
10 before commencing creating the connection.
2. A method according to claim 1 in which the method is used to  
hand-over a network connection to the network from an existing network.
- 15 3. A method according to claim 2 in which the network connection  
between the computing device and the network and/or existing network  
comprises one or more channels.
4. A method according to claim 3 in which the method comprises  
20 causing the processing circuitry to determine the bandwidth required by  
each of the channels within the network connection.
5. A method according to claim 3 or 4 in which the method allows  
some channels to be maintained with the existing network, whilst other  
25 channels are handed over to the network.
6. A method according to claim 3 or 4 in which the method allows  
some channels to be handed over to the network whilst other channels are  
terminated if they are not handed over to the network.

7. A method according to any of claims 3 to 6 in which the computing device ranks the order of importance of the channels to be handed over to the network.
- 5 8. A method according to any of claims 2 to 7 in which the method is arranged to hand-over a connection between an existing network and a network each running the same, or substantially the same, protocol.
9. A method according to claim 8 in which the method is used to  
10 hand-over a connection from an existing network comprising a first cell of a network and a network comprising a second, different, cell of that network.
10. A method according to any of claims 2 to 7 which is arranged to  
15 hand-over a connection from an existing network to a network operating on a different protocol.
11. A method according to any of claims 2 to 10 in which the  
20 bandwidth of connections that exist within the network are restricted in order to allow the network hand-over to take place.
12. A method according to claim 11 in which the restriction comprises termination.
- 25 13. A processing unit arranged to provide a wireless network capable of making one or more data connections to computing devices, said processing unit comprising a receiving means, arranged to receive data specifying the bandwidth requirements for a network connection between the network and a computing device that wishes to join the network, a  
30 processing means, arranged to process data received from said receiving

means and if bandwidth is available to cause an allocation means to allocate a bandwidth to at least one of the connections.

14. A processing unit according to claim 13 in which the receiving  
5 means also provides a receiving means of the wireless network.

15. A computing device capable of connecting to at least one wireless network, said computing device comprising a detection means arranged to detect the existence of wireless networks to which it is capable of  
10 connecting, a bandwidth measuring means, arranged to determine the bandwidth of one or more connections that it is desired to make with a network, and transmission means arranged to transmit the bandwidth determined by the bandwidth measuring means to a network detected by the network detection means to which it is possible to make a connection;  
15 said computing device further comprising a transceiver arranged to establish a connection with said network should sufficient bandwidth be available.

16. A computing device according to claim 15 which is capable of  
20 connecting to two or more networks operating different protocols.

17. A computing device according to claim 15 or 16 which is arranged to transfer at least portions of an existing connection from an existing network to a network.

25

18. A computing device according to claim 17 which is arranged to prioritise portions of the existing connection to the existing network that should be maintained over and above other portions of the existing connection.

30

19. A computer network comprising a processing unit providing a wireless network comprising at least one data connection to a computing device, said processing unit comprising a receiving means, arranged to receive data from said computing device, said network further comprising  
5 a bandwidth assessing means arranged to determine the bandwidth requirements for further network connections that it is desired to make to the network from one of said computing device and another computing device wishing to join the network, the processing means further comprising a processing means arranged to process data received from  
10 said receiving means and cause an allocation means to allocate a bandwidth to at least one of the connections.

20. A data carrying medium containing instructions, which when loaded on to a computer system, cause that computer system to perform  
15 the method of any of claims 1 to 12.

21. A data carrying medium containing instructions, which when loaded on to a processing unit, cause that processing unit to perform as the processing unit of claim 13 or 14.  
20

22. A data carrying medium containing instruction, which when loaded on to a computing device, cause that computing device to perform as the computing device according to any of claims 15 to 18.

25 23. A data carrying medium containing instruction, which when loaded on to a network, cause that network to perform as the network of claim 19.

**ABSTRACT**

5       **METHOD AND ASSOCIATED APPARATUS FOR CREATING A**  
          **NETWORK CONNECTION TO A NETWORK**

A method of at least partially creating a network connection from a  
computing device 102 to a network H wherein the method comprises  
10 determining the bandwidth associated with the network connection that it  
is desired to make to the computing device 102 from the network H and  
assessing whether this bandwidth is available from the network H before  
commencing creating the connection. Generally, this method will be used  
during a hand-over process from an existing network N to the  
15 network H.

To be accompanied, when published, by Figure 2 of the drawings.







2/5

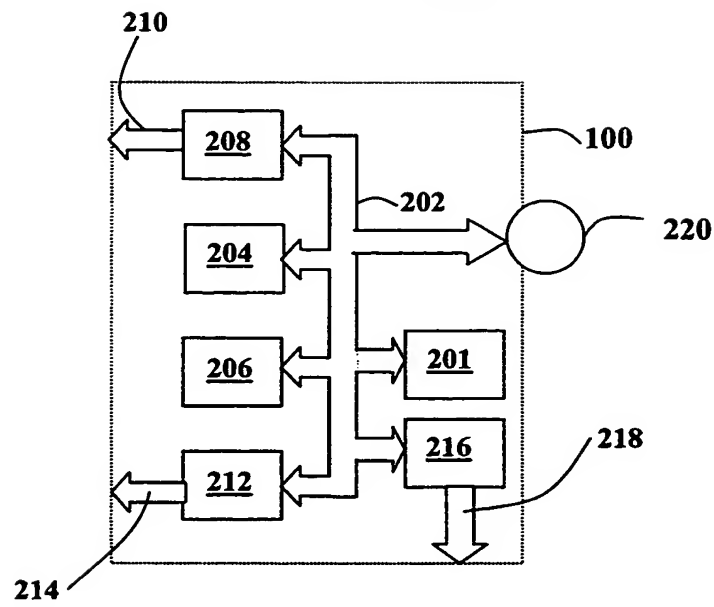


Fig. 3

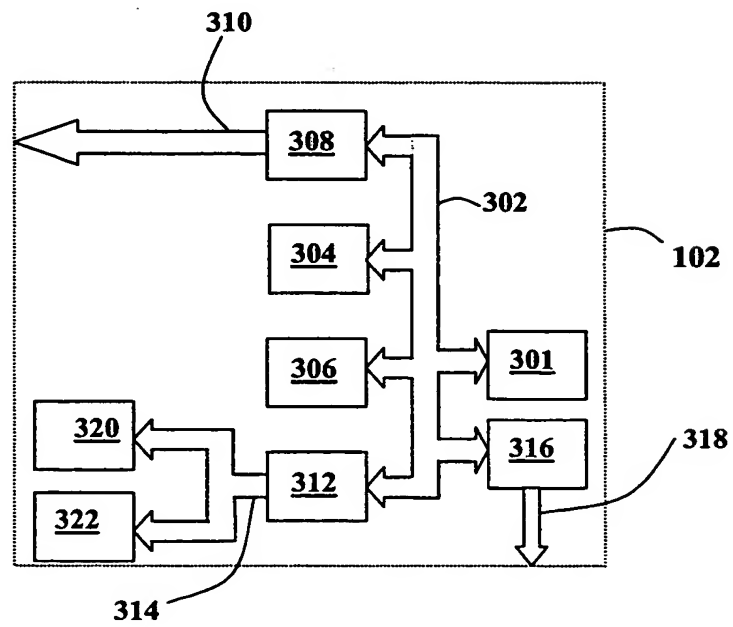


Fig. 4



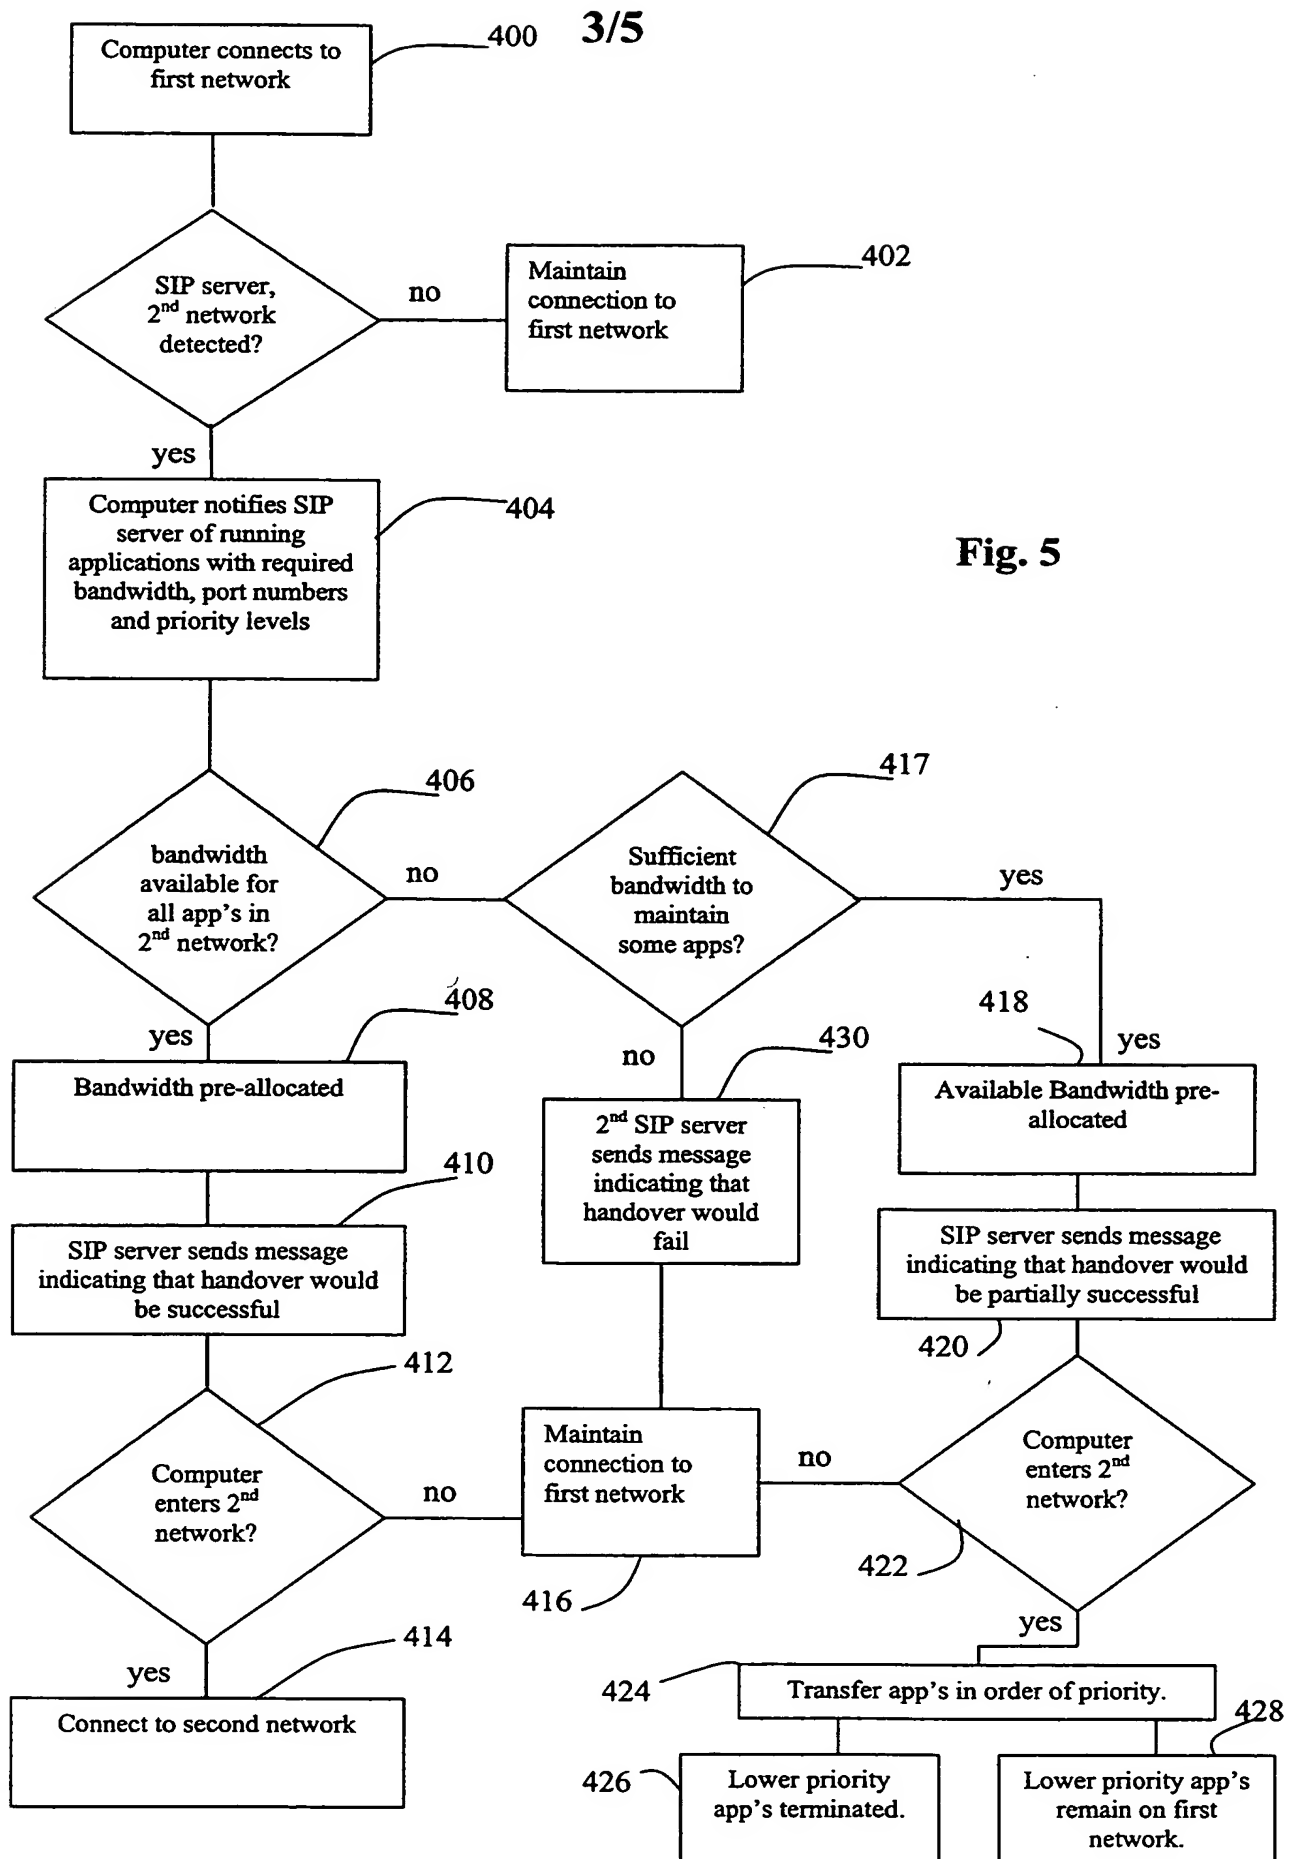


Fig. 5



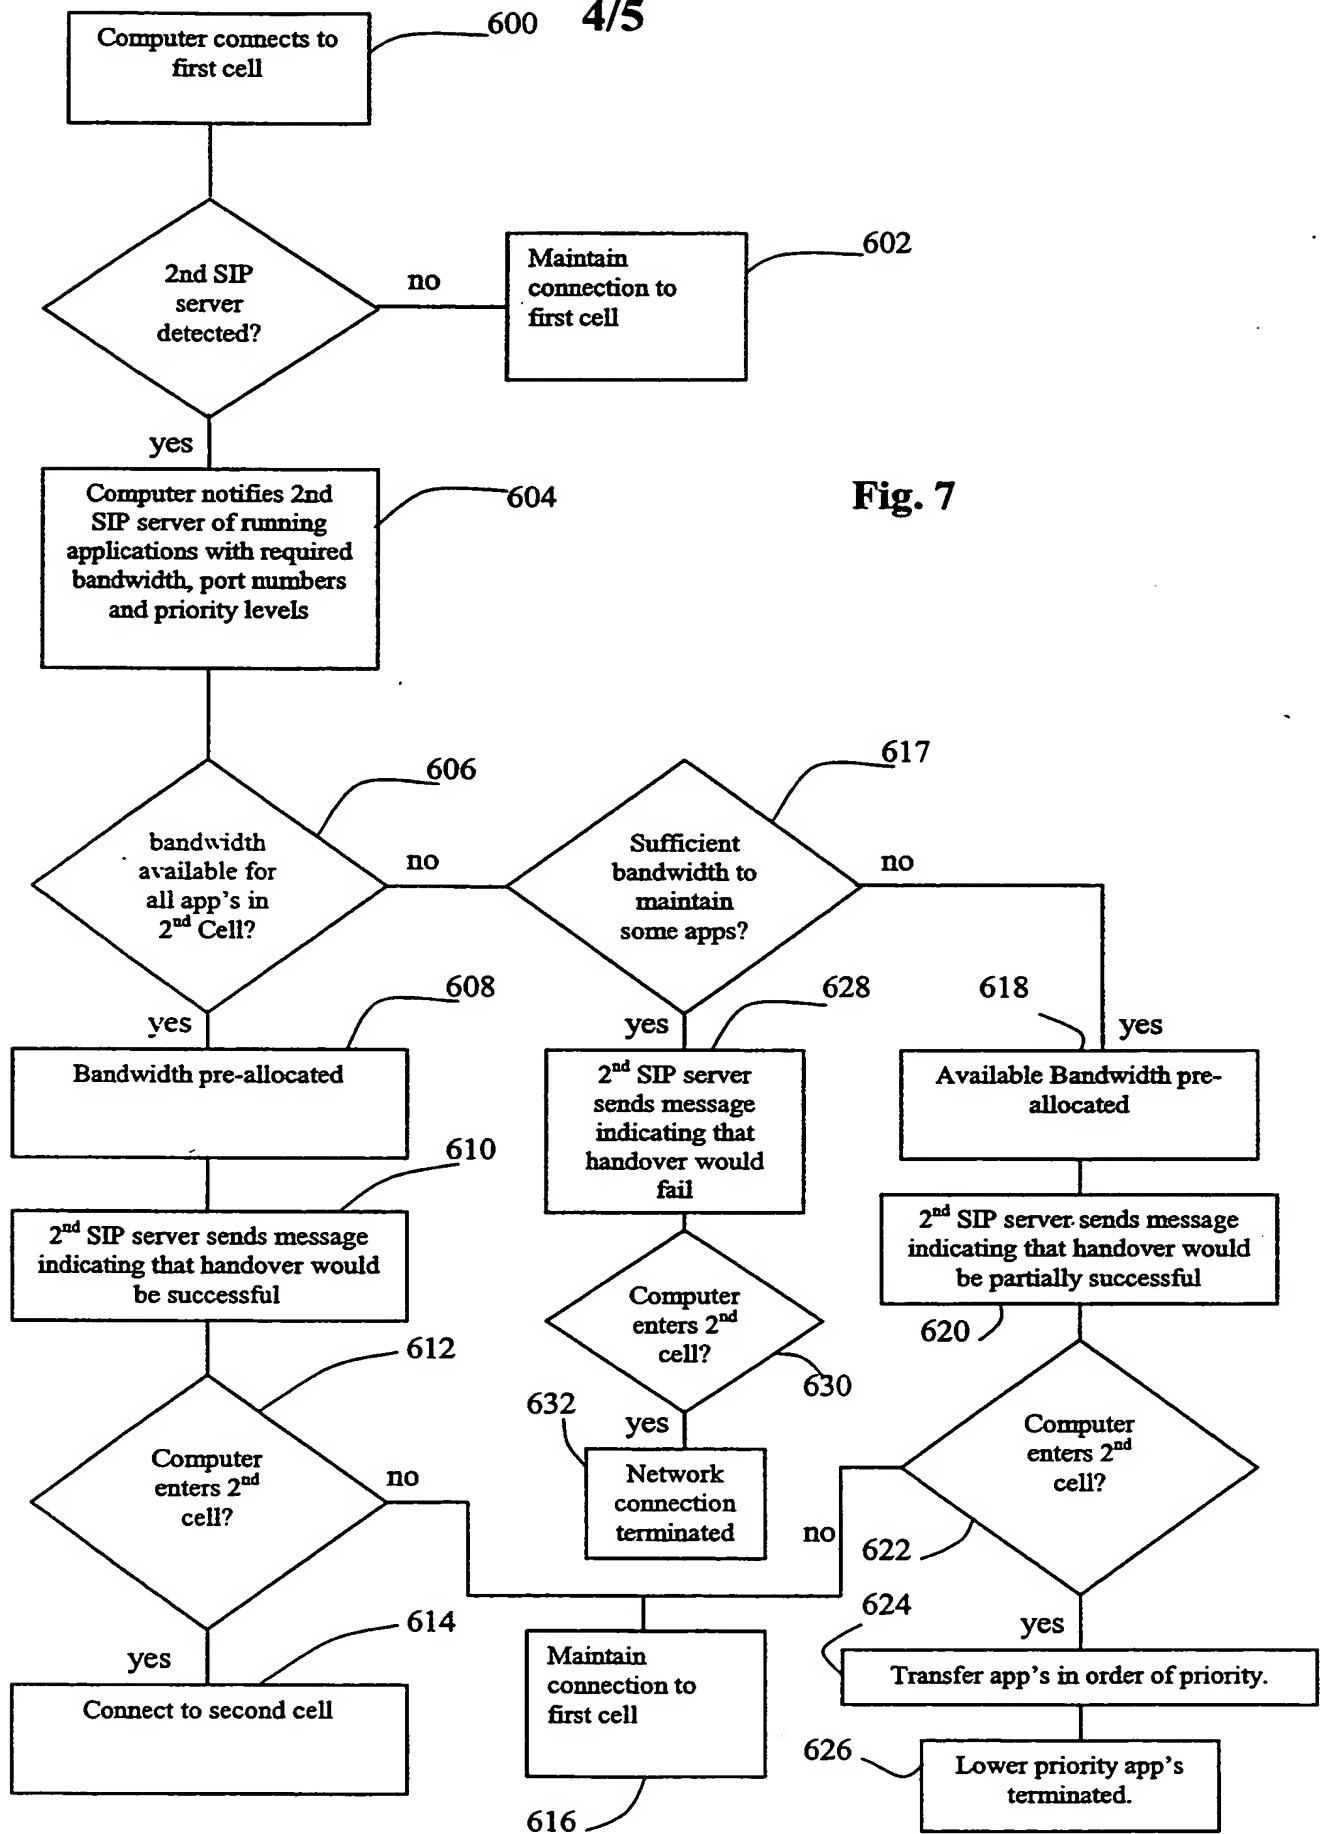


Fig. 7





TCP/IP	OSI
Application Layer	Application Layer
Transport Layer	Presentation Layer
	Session Layer
	Transport Layer
Internet Layer	Network Layer
Network Access Layer	Data Link Layer
	Physical Layer

Fig. 8

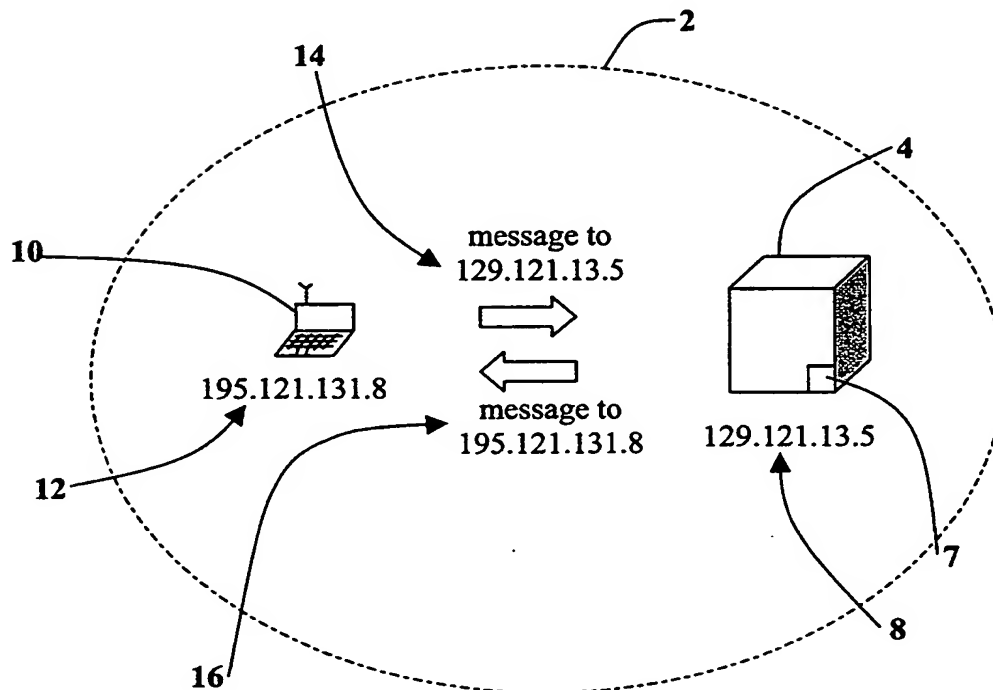


Fig. 1

